

## INDI ARC X

L80 B10 > 54 000h | SDCM 3 | LLMF 84% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
INDI ARC X 15	16W	1280 Lm	120 lm/W	1/4 Ø 1200 x 57 x 75 mm	IARX15
INDI ARC X 20	27W	2150 Lm	120 lm/W	1/4 Ø 1200 x 57 x 75 mm	IARX20

\*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

### MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - OPQ-Opal/Polycarbonate


### INSTALLATION

Suspended

### FIXINGS

	INFO	CODE
End Cap	Single/Metal*	INDI-ENDCAP
	Single/PC	INDI-ENDCAP-S
Joint	Inline	INDI-JOINT-I
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP

\*Any RAL colour option available. Order example: **INDI-ENDCAP-GR**

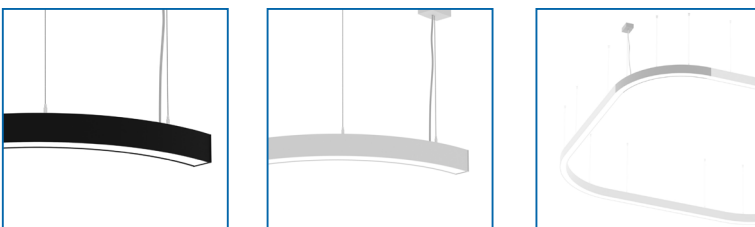

### ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL
CRI	
≥ 90	C90

THROUGH WIRING*	
5-phase through wiring	TW5

\*Available on request

Order code example: **IARX15-4K-ST-GR**