



## GARDA SM

L90 B10 > 60 000h | SDCM 3 | LLMF 91% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT *	EFFICACY *	PRODUCT SIZE	ORDER REFERENCE
GARDA SM 15	15W	1640 Lm	109 lm/W	169 x 169 x 165 mm	GASM15
GARDA SM 20	21W	2270 Lm	108 lm/W	169 x 169 x 165 mm	GASM20
GARDA SM 30	29W	3090 Lm	107 lm/W	169 x 169 x 165 mm	GASM30

\*Values are given for colour temperature of 4000K, GLS diffuser, CRI 80 and may vary for other options

### MATERIALS

CASING - powder painted aluminium; standard colour - white

DIFFUSER - transparent tempered glass

REFLECTOR - polished aluminium with a purity of 99,85%

### INSTALLATION

Surface mounted

### ORDER CODE

#### COLOUR TEMPERATURE

3000K 3K

4000K 4K

#### DRIVER TYPE

Standard ST

Dimming - DALI DL

#### DIFFUSER

Transparent tempered glass (SH) GLS

Matte tempered glass (SH MAT) MGL

#### CASING COLOUR

White WH


Grey GR

Black BL

Custom RAL

#### CRI

≥ 90 C90

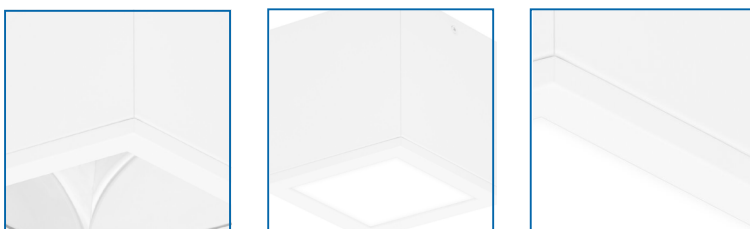

Order code example: **GASM20-4K-ST-GLS-WH**