

## GARDA

L90 B10 > 60 000h | SDCM 3 | LLMF 91% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT *	EFFICACY *	PRODUCT SIZE	ORDER REFERENCE
GARDA 15	15W	1500 Lm	100 lm/W	169 x 169 x 100 mm	GARD15
GARDA 20	21W	2080 Lm	99 lm/W	169 x 169 x 100 mm	GARD20
GARDA 25	29W	2830 Lm	98 lm/W	169 x 169 x 100 mm	GARD25

\*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

### MATERIALS

CASING - powder painted aluminium; standard colour - white


DIFFUSER - transparent tempered glass

REFLECTOR - polished aluminium with a purity of 99,85%

### INSTALLATION

Recessed into the modular ceiling

Recessed into plaster-cardboard

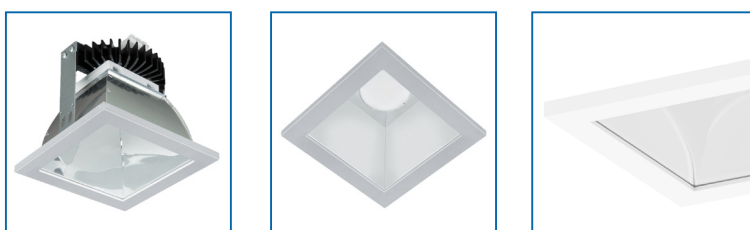

### ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVERTYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
White	WH
Grey	GR
Black	BL
Custom	RAL
EMERGENCY MODULE	
3 hr	EM
CRI	
≥ 90	C90

Order code example: **GARD20-4K-ST-WH**