

SOLIS LITE Q

L80 B10 > 36 000h | SDCM 3 | LLMF 78% | CRI 80+

| PRODUCT NAME | MIN-MAX POWER CONSUMPTION | MIN-MAX LUMEN OUTPUT* | MIN-MAX EFFICACY* | PRODUCT SIZE | ORDER REFERENCE |
|--------------------------------|---------------------------|-----------------------|-------------------|--------------------|-----------------|
| SOLIS LITE Q L | 11-37W | 1850-6110 Lm | 168-163lm/W | 595 x 595 x 34 mm | SLQL |
| SOLIS LITE Q XL | 11-37W | 1630-5400 Lm | 148-146lm/W | 1195 x 295 x 34 mm | SLQXL |
| SOLIS LITE Q L SP (Suspended) | 11-37W | 1850-6110 Lm | 168-163lm/W | 595 x 595 x 68 mm | SLQLS |
| SOLIS LITE Q XL SP (Suspended) | 11-37W | 1630-5400 Lm | 148-146lm/W | 1195 x 295 x 68 mm | SLQXLS |

*Values are given for colour temperature of 4000K and may vary for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - white

DIFFUSER - HEX-Micro-prismatic/PMMA

ACCESSORIES

| | INFO | CODE |
|---------------------------|--------------------|--------------|
| Surface Mounting Housing* | 605 x 605 x 68 mm | SLLQ-L-HOUS |
| | 305 x 1205 x 68 mm | SLLQ-XL-HOUS |
| Suspension Y | 600 x 600 mm | SLLL-Y |
| | 300 x 1200 mm | SLXL-Y |


*Any RAL colour option available. Order example: **SLLQ-L-HOUS-GR**

INSTALLATION

Suspended

Surface mounted

Recessed into the modular ceiling

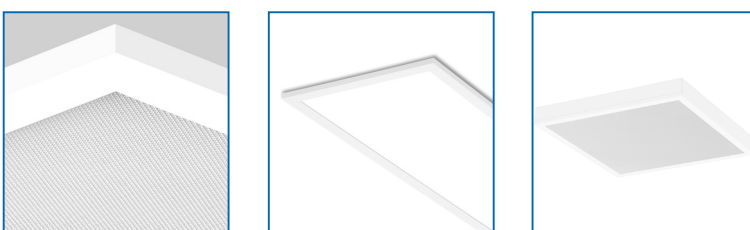

ORDER CODE

| COLOUR TEMPERATURE | |
|--------------------------|-----|
| 3000K | 3K |
| 4000K | 4K |
| DRIVER TYPE | |
| Standard | ST |
| Dimming - DALI | DL |
| CASING COLOUR | |
| White | WH |
| Grey | GR |
| Black | BL |
| Custom | RAL |
| REMOTE EMERGENCY MODULE* | |
| 3 hr | EM |

*Available on request

Order code example: **SLQL11-4K-DL-WH**