

## GEO LINE

L80 B10 > 52 000h | SDCM 3 | LLMF 88% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
GEO LINE 25	24W	2400 Lm	100 lm/W	545 x 100 x 62 mm	GELI25
GEO LINE 50	46W	4800 Lm	104 lm/W	1085 x 100 x 62 mm	GELI50
GEO LINE 70	68W	7200 Lm	106 lm/W	1625 x 100 x 62 mm	GELI70
GEO LINE 95	92W	9600 Lm	104 lm/W	2170 x 100 x 62 mm	GELI95

\*Values are given for colour temperature of 4000K, CRI 80 and may vary for other options

### MATERIALS

CASING - powder painted aluminum profile; standard colour - grey

DIFFUSER - OPQ-Opal/Polycarbonate


### INSTALLATION

Suspended

### FIXINGS

	INFO	CODE
End Cap	Single/Metal*	GEO-ENDCAP
Joint	Inline	GEO-JOINT-I
Suspension Kit	Simple INOX	ZLISS-INOX
	Electrical*	ZLISS-SUSP

\*Any RAL colour option available. Order example: **GEO-ENDCAP-GR**

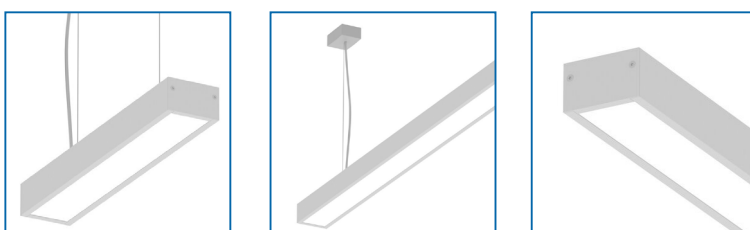

### ORDER CODE

#### COLOUR TEMPERATURE

3000K 3K

4000K 4K

#### DRIVER TYPE

Standard ST

Dimming - DALI DL

#### CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

#### CRI

≥ 90 C90

#### THROUGH WIRING\*

5-phase through wiring TW5

\*Available on request

Order code example: **GELI25-4K-ST-BL**