

FLYLINE C

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	COLOUR TEMPERATURE	ORDER REFERENCE
FLYLINE C 30	25W	3065 Lm	123 lm/W	585 x 73 x 75 mm	3000K	FLYC30
FLYLINE C 30	25W	3215 Lm	129 lm/W	585 x 73 x 75 mm	4000K	FLYC30

*Values are given for HEX diffuser, CRI 80 and may vary for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

DIFFUSER - OPQ-Opal/Polycarbonate, HEX-Micro-prismatic/PMMA


INSTALLATION

Recessed into plaster-cardboard

FIXINGS

	INFO	CODE
End Cap	Single*	FLYL-ENDCAP
Joints	Inline Recessed	FLYL-JOINT-I
	Corner 90°*	FLYL-JOINT-C

*Any RAL colour option available. Order example: **FLYL-ENDCAP-GR**

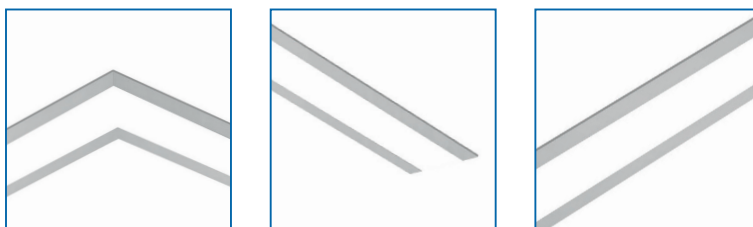

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

DIFFUSER

Micro-prismatic HEX

Opal OPQ

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

CRI

≥ 90 C90

Order code example: **FLYC30-4K-ST-HEX-GR**