

ARGO QUAD

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
ARGO QUAD S 20	18W	2020 Lm	112 lm/W	307 x 307 x 65 mm	ARQS20
ARGO QUAD M 30	23W	2850 Lm	124 lm/W	407 x 407 x 65 mm	ARQM30
ARGO QUAD L 35	28W	3420 Lm	122lm/W	595 x 295 x 65 mm	ARQL35
ARGO QUAD L 45	36W	4380 Lm	122 lm/W	595 x 295 x 65 mm	ARQL45

*Values are given for colour temperature of 4000K , OPQ diffuser and may vary for other options

MATERIALS

CASING - electrostatically painted aluminium; standard colour - grey

BASE - steel sheet


DIFFUSER - OPQ-Opal/Polycarbonate

INSTALLATION

Surface mounted

Suspended

Wall mounted

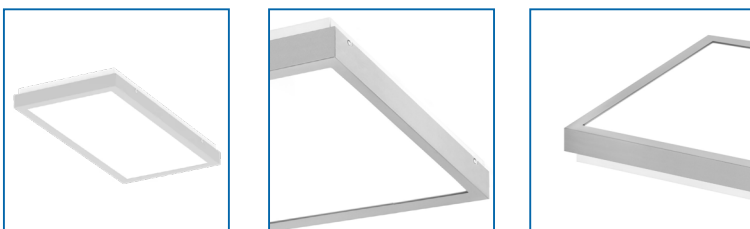

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

CASING COLOUR

White WH

Grey GR

Black BL

Custom RAL

EMERGENCY MODULE*

3 hr EM

ADD-ONS

Motion Sensor MS

*Only available in ARQM30

Order code example: **ARQS20-4K-ST-WH**