

GEO CR

L80 B10 > 54 000h | SDCM 3 | LLMF 85% | CRI 80-90+

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
GEO CR S 85	86W	8650 Lm	101 lm/W	Ø 800 x 62 mm	GECS85
GEO CR L 140	140W	14000 Lm	100 lm/W	Ø 1200 x 62 mm	GECL140

*Values are given for 4000K colour temperature, OPQ diffuser, CRI 80 and may vary for other options

MATERIALS

CASING - powder painted aluminium; standard colour - grey


DIFFUSER - OPQ-Opal/Polycarbonate

INSTALLATION

Suspended

ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVERTYPE	
Standard	ST
Dimming - DALI	DL
DIFFUSER	
Microprismatic	HEX
Opal	OPQ
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL
CRI	
≥ 90	C90

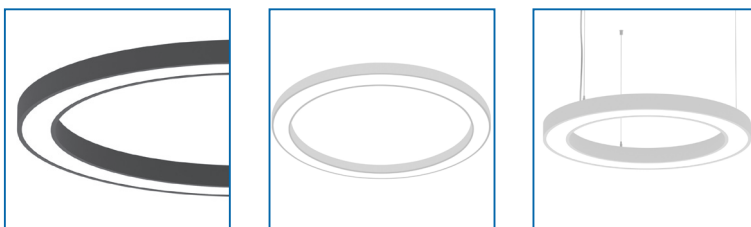

Order code example: **GECS85-4K-ST-OPQ-GR**