

## GARDA SM

L90 B10 > 60 000h | SDCM 3 | LLMF 91% | CRI 84

| PRODUCT NAME | POWER CONSUMPTION | LUMEN OUTPUT * | EFFICACY * | PRODUCT SIZE       | ORDER REFERENCE |
|--------------|-------------------|----------------|------------|--------------------|-----------------|
| GARDA SM 15  | 15W               | 1640 Lm        | 109 lm/W   | 169 x 169 x 165 mm | GASM15          |
| GARDA SM 20  | 21W               | 2270 Lm        | 108 lm/W   | 169 x 169 x 165 mm | GASM20          |
| GARDA SM 30  | 29W               | 3090 Lm        | 107 lm/W   | 169 x 169 x 165 mm | GASM30          |

\*Values are given for colour temperature of 4000K/ GLS diffuser, and may vary for other options

### MATERIALS

CASING - powder painted aluminium; standard colour - white

DIFFUSER - transparent tempered glass

REFLECTOR - polished aluminium with a purty of 99,85%

### INSTALLATION

Surface mounted

### ORDER CODE

#### COLOUR TEMPERATURE

3000K 3K

4000K 4K

#### DRIVER TYPE

Standard ST

Dimming - DALI DL

#### DIFFUSER

Transparent tempered glass (SH) GLS

Matte tempered glass (SH MAT) MGL


#### CASING COLOUR

White WH

Grey GR

Black BL

Custom RAL

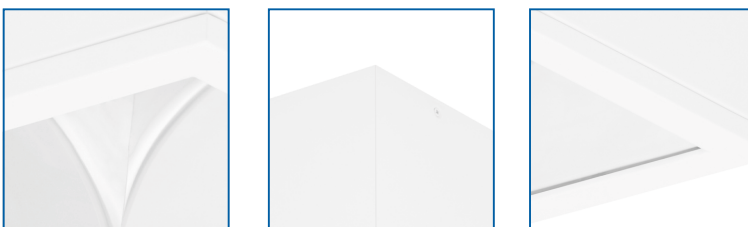

Order code example: **GASM20-4K-ST-GLS-WH**