

GEO LINE

L80 B10 > 72 000h | SDCM 3 | LLMF 88% | CRI 80

| PRODUCT NAME | POWER CONSUMPTION | LUMEN OUTPUT* | EFFICACY* | PRODUCT SIZE | ORDER REFERENCE |
|--------------|-------------------|---------------|-----------|--------------------|-----------------|
| GEO LINE 25 | 24W | 2400 Lm | 100 lm/W | 545 x 100 x 62 mm | GELI25 |
| GEO LINE 50 | 46W | 4800 Lm | 104 lm/W | 1085 x 100 x 62 mm | GELI50 |
| GEO LINE 70 | 68W | 7200 Lm | 106 lm/W | 1625 x 100 x 62 mm | GELI70 |
| GEO LINE 95 | 92W | 9600 Lm | 104 lm/W | 2170 x 100 x 62 mm | GELI95 |

*Values are given for colour temperature of 4000K and may vary for other options

MATERIALS

CASING - powder painted aluminum profile; standard colour - grey

DIFFUSER - opal


INSTALLATION

Suspended

FIXINGS

| | INFO | CODE |
|----------------|---------------|-------------|
| End Cap | Single/Metal* | GEO-ENDCAP |
| Joint | Inline | GEO-JOINT-I |
| Suspension Kit | Simple INOX | ZLISS-INOX |
| | Electrical* | ZLISS-SUSP |

*Any RAL colour option available. Order example: **GEO-ENDCAP-GR**

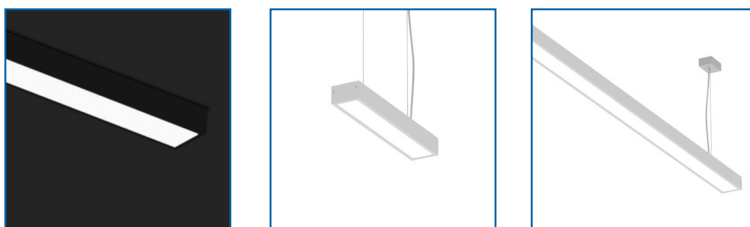

ORDER CODE

COLOUR TEMPERATURE

3000K 3K

4000K 4K

DRIVER TYPE

Standard ST

Dimming - DALI DL

CASING COLOUR

Grey GR

White WH

Black BL

Custom RAL

Order code example: **GELI25-4K-ST-BL**