

## PISTON WM

L90 B10 > 60 000h | SDCM 3 | LLMF 91% | CRI 80

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	BEAM ANGLE	ORDER REFERENCE
PISTON WM 10	10W	1130 Lm	113 lm/W	Ø 80 x 232 mm	50 °	PIWM10
PISTON WM 15	15W	1630 Lm	109 lm/W	Ø 80 x 232 mm	50 °	PIWM15
PISTON WM 30	26W	2940 Lm	113 lm/W	Ø 80 x 232 mm	50 °	PIWM30

\*Values are given for colour temperature of 4000K and may vary for other options


### MATERIALS

CASING - electrostatically painted aluminium;  
standard colour - anthracite grey

DIFFUSER - transparent tempered glass

### INSTALLATION

Wall mounted

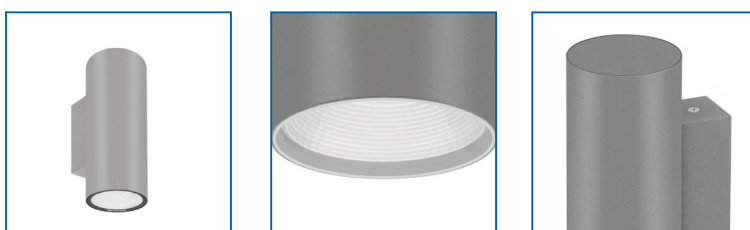

### ORDER CODE

COLOUR TEMPERATURE	
3000K	3K
4000K	4K
DRIVER TYPE	
Standard	ST
Dimming - DALI	DL
CASING COLOUR	
Grey	GR
White	WH
Black	BL
Custom	RAL

Order code example: **PIWM15-4K-ST-BL**