

GAMMA WL

L70: > 60,000 hours (@Ts = 85°C) | CRI > 80

PRODUCT NAME	POWER CONSUMPTION	LUMEN OUTPUT*	EFFICACY*	PRODUCT SIZE	ORDER REFERENCE
GAMMA WL 16	36W	5760 Lm	160 lm/W	620 x 58 x 67 mm	GMWL16
GAMMA WL 24	50W	7900 Lm	158 lm/W	920 x 58 x 67 mm	GMWL24

*Values are given for colour temperature of 4000K / HEX diffuser and may vary for other options


ACCESSORIES

INFO	CODE
Adjustable angle bracket up to 90 deg	GMANG
High Bay kit Allows the product to be used as High Bay fitting*	GMRF-900-60

*Only available for model GAMMA MP 24

INSTALLATION

- Surface mounted
- Suspended (includes 5m flex with plug)

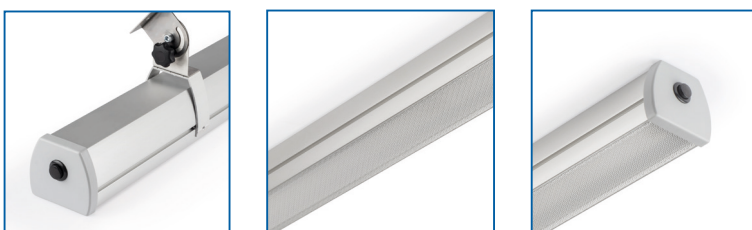

MATERIALS

- CASING - aluminium extrusion
- DIFFUSER - PMMA, PC
- BRACKET - aluminium

ORDER CODE

COLOUR TEMPERATURE

3000K	3K
4000K	4K

DRIVER TYPE

Standard	ST
Dimming - DALI	DL
Dimming - DSI	DSI
Dimming - switchDALI	SDL
Dimming - corridorFUNCTION	CF

DIFFUSER

Microprismatic	HEX
Opal	OPQ

REGION (PLUG)

United Kingdom	UK
Europe	EU

Order code example: **GMWL24-4K-DL-HEX-UK**